

UHF RFID Cable Tie Tag



Quick Details

LDR-TZ01 UHF RFID Cable Tie Tag is designed as a zip. It is made of ABS and nylon material which can work in tough environment and with long lifespan and waterproof. It is disposable that cannot be separated after zipped. It can realize the track management of goods, meat and baggage.


Description

RFID Parameter	
Model No.	LDR-TZ01
Type	Passive UHF RFID Hard Tag
Protocol	ISO/IEC 18000-6C, EPC Class1 Gen2
Frequency	Worldwide 840-960Mhz, US 902-928mhz, EU 865-868Mhz
Chip	NXP Ucode8
Memory	EPC 128bits
	TID 48bits
	User 0bits
Read&Write	Supported
Read Range	1-5meters adjustable(reader and environment dependent)
Data retention	10years
Programming Cycles	100,000 cycles
Anti-collision	Yes

Physical Parameter	
Color	Blue, Green, Yellow or customized
Size	92x28x3.6mm (LxWxH) , tail length:365mm
Antenna Material	PET+ Aluminum Etching
Surface Material	ABS+ Nylon
Installation	Zip Tie Seal, Inseparable when zipped
Operating temperature	-25℃ ~ +65℃
Operating humidity	20% ~ 90%RH
Package	50pcs/bag, 1000pcs/CTN, CTN size: :53*30*32CM
Customized Service	Printing, EPC Pre-written

Application

- ✓ RFID Pork tracking & Fresh Guarantee
- ✓ Logistic Seal Packages, Airport baggage tracking
- ✓ Tough environment that needs to zip

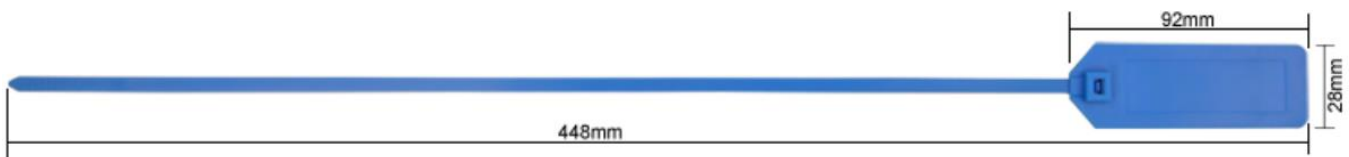

Size: 92x28x3.6mm (LxWxH) , tail length:365mm